


**Geberit Kappa concealed cistern 15 cm, 6 / 3 litres, installation height 82 cm**



Example image

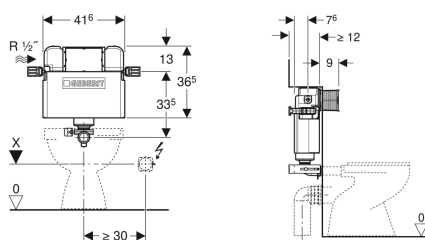

**Application purposes**

- For drywall construction
- For installation in part- or room-height prewall installations
- For installation in room-height installation walls
- For floor-standing WCs

**Characteristics**

- Adjustable in depth
- Concealed cistern with front actuation
- Concealed cistern, fully insulated against condensation
- Cistern fulfils standard requirements in accordance with EN 14055, Class II
- Immediate post flush possible with factory setting

**Scope of delivery**

- Water supply connection Rp 1/2" - R 1/2", compatible with MF, with integrated angle stop valve and hand wheel
- Protection box for service opening

- Welded flush bend
- Water supply connection on the left
- Connection hose on angle stop valve can be attached without tools
- Protection cover box for service opening protects against moisture and dirt
- Protection box for service opening can be cut to length without tools

**Technical data**

|                                      |             |
|--------------------------------------|-------------|
| Flow pressure                        | 0.1-10 bar  |
| Maximum operating temperature, water | 25 °C       |
| Flush volume, factory setting        | 5.8 and 3 l |
| Flush volume small, adjustment range | 3-4 l       |

- Protection plug
- 2 fixing brackets
- Fastening material

| Art. no.     | B       | H       | T     |
|--------------|---------|---------|-------|
| 109.205.00.1 | 41.6 cm | 36.5 cm | 12 cm |



- For access the top of the cistern may be cut in accordance with the instructions
- The cistern can be operated with used water (rainwater) provided it is passed through a filter system first
- To reduce flush volume to either 4.5/3 l dual flush or 4/2.6 l dual flush requires material number 242.310.00.1 (note: must be used with pans designed for low volume flush)